

550DB

Salon TV Removal

Tools Needed

1. Stubby Phillips Screwdriver

Materials List

1. Television, 30" ZENITH LCD – P/N 1753769


Euro Model

1. Television, 32" LCD EURO (SHARP)– P/N 1791397

Flat Rate Time Allowances

Flat Rate Time - 1.5 Hours

550DB Salon TV Removal

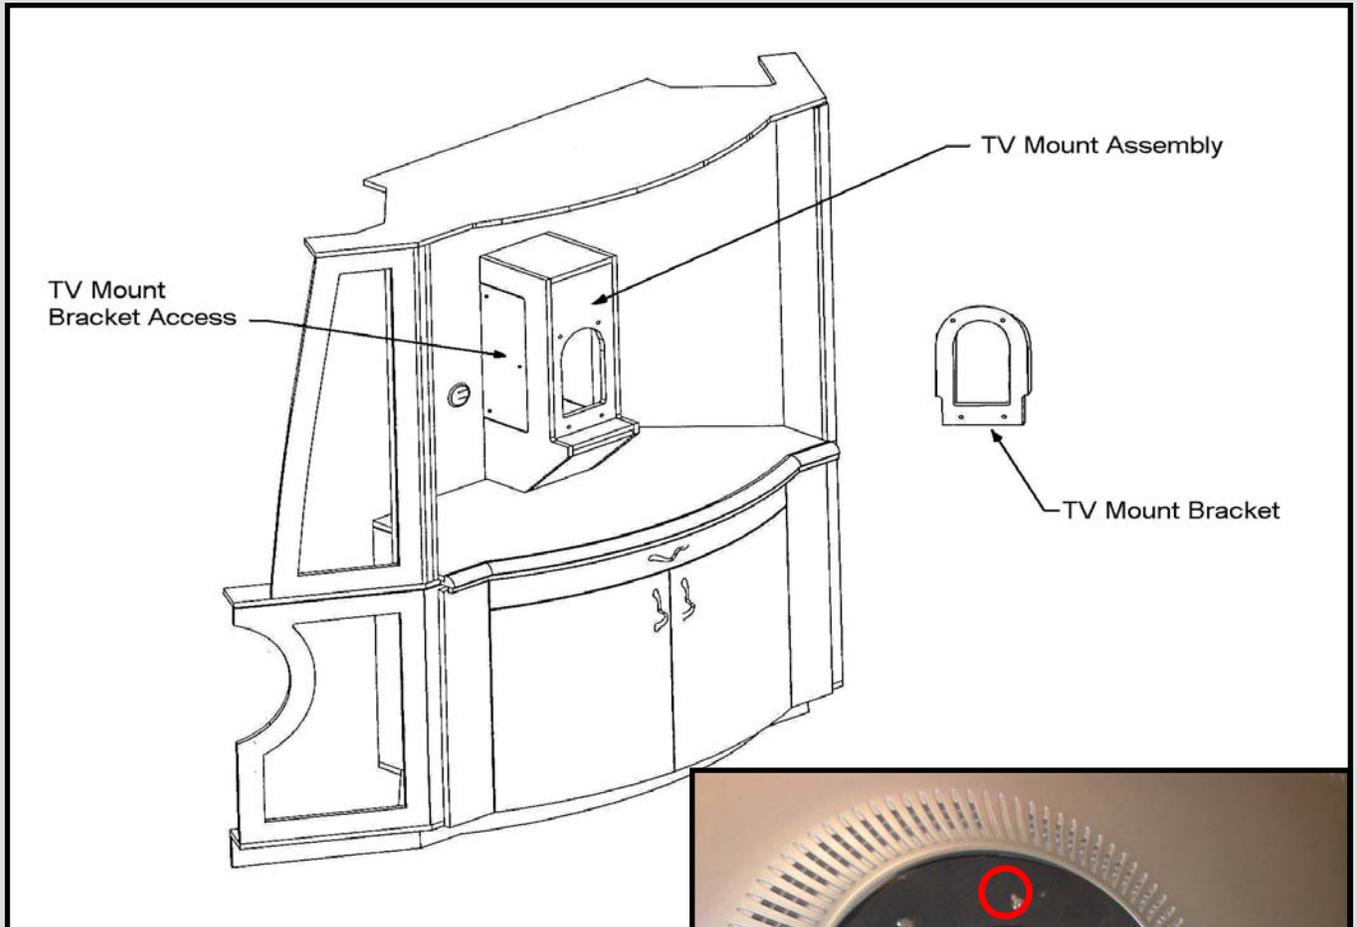

Note

TV Mount Bracket Is Secured To Back Of TV Using Five 8/32 x 1/2 PPH Machine Screws (Figure 1.1).

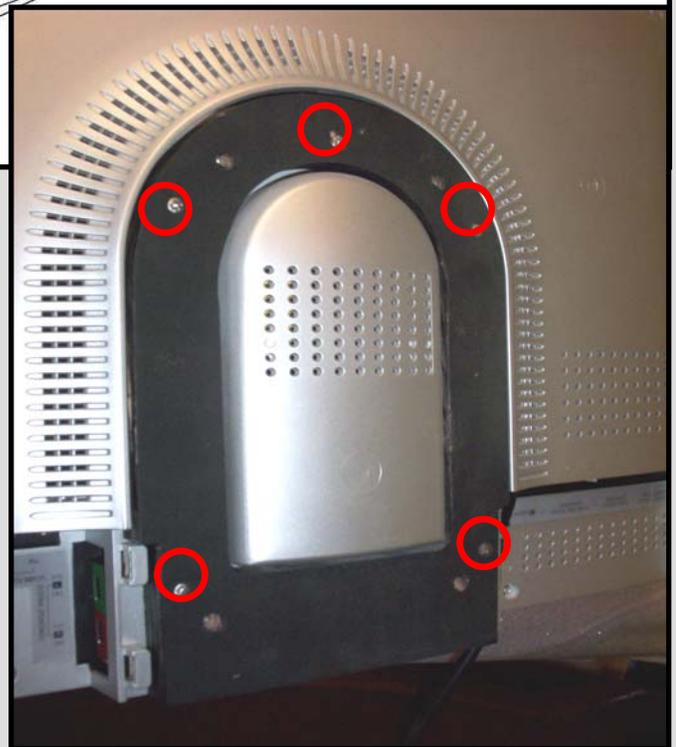


Figure 1.1

550DB

Salon TV Removal

Step 1

Reach Behind The TV And Remove Three Screws That Secure The TV Bracket Access Panel From Each Side Of The TV Mount Assembly (Figure 1.2).

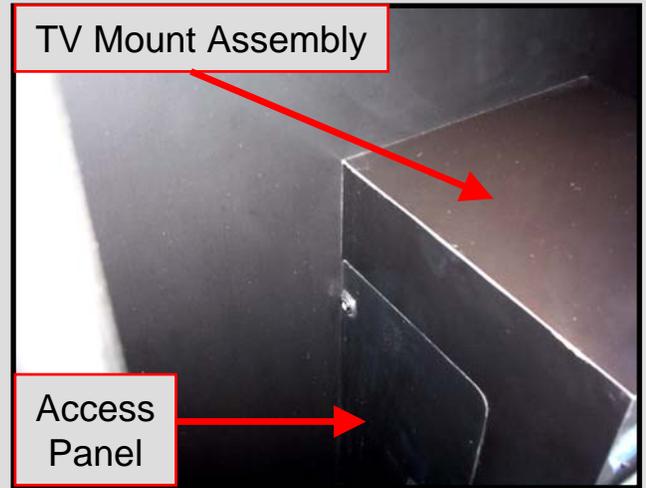


Figure 1.2

Step 2

With Access Panels Removed, Reach Inside Opening With Stubby Screwdriver To Remove (Four), 1/4 -20 Screws That Secure TV Bracket To Assembly (Figure 1.3). *(TV Not Installed To Assist With Visual Reference)*

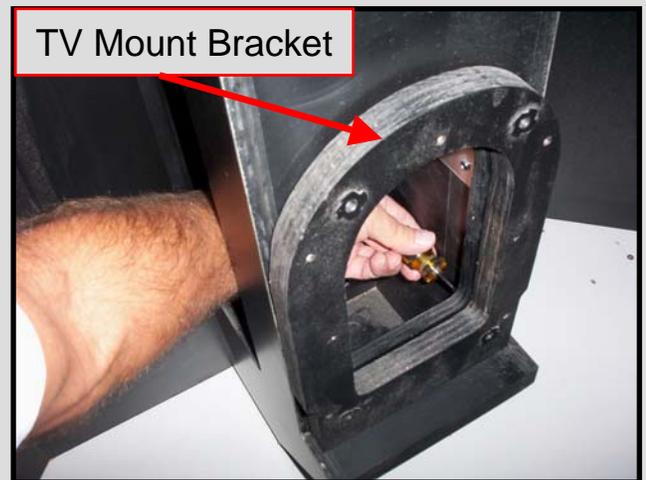


Figure 1.3

Step 3

Install TV Using Reverse Procedure.

Step 4

Clean Work Area.